

AN AGREEMENT BETWEEN NATIONAL SIGNS, LLC (SELLER) AND: CITY OF DEER PARK (BUYER)
 PROJECT NAME: FIRE STATION 2
 AUTHORIZED REPRESENTATIVE: JAMES LEWIS PHONE: 281-478-2036 EMAIL: jlewis@deerparktx.org
 BILLING ADDRESS: 710 East San Augustine Street Deer Park, Texas 77536
 JOB LOCATION: 950 W. PASADENA BLVD. DEER PARK, TX 77536
 NSL ACCOUNT EXECUTIVE: GLORIA BAKER

WE HEREBY SUBMIT SPECIFICATIONS AND INVESTMENT AMOUNT FOR:

Choice Partners CoOp CONTRACT #: 22/023MJ-01

ST A -OPTION 1: PYLON SIGN WITH 15.85MM LED DISPLAY - \$73,425.00
 MANUFACTURE AND INSTALL (1) DF INTERNALLY ILLUMINATED PYLON SIGN AT 16'-1" X 10'-6".

- 1) CABINET TO BE ALL ALUMINUM CONSTRUCTION- .125 ALUMINUM OVER 2" ALUMINUM ANGLE FRAMING WITH ACRYLIC POLYURETHANE PAINTED FINISH.
- 2) PRIMARY COPY TO BE ROUTED AND BACKED BY 3/4" ACRYLIC WITH VINYL OVERLAY.
- 3) SECONDARY IDENTIFICATION COPY TO BE ROUTED AND BACKED BY 3/16" ACRYLIC WITH VINYL OVERLAY.
- 4) INTERNALLY ILLUMINATED WITH WHITE LED.
- 5) SIGN TO HAVE (1) GS6 40 X 150 15.85 DF RGB LED MESSAGE CENTER. OVERALL CABINET TO BE 2'-7" X 8'-1" WITH 2'-1" X 7'-10" VIEWABLE DISPLAY AREA.
- 6) SIGN MOUNTED TO 10" STD WALL PIPE AND SET IN 3'-0" X 9'-6" DEEP FOOTING. CONCRETE PEDESTAL TO BE 3" ABOVE AND BELOW GRADE, WITH 3" OUTLAY FROM SIGN HOOKED UP TO CUSTOMER PROVIDED PRIMARY POWER AT TIME OF INSTALLATION. HOOKED UP TO CUSTOMER PROVIDED PRIMARY - AMPS ON (14.2) Amps ON (2) 120 VOLT CIRCUITS

LED - \$34,250.00
 MAIN SIGN & STRUCTURE - \$39,175.00
 LOYALTY DISCOUNT (5.25%) - <3,855.00>

COST OF RUNNING PRIMARY ELECTRICAL TO SIGN AREA NOT INCLUDED IN THIS PROPOSAL

Permits, Engineering, Lane Closures and related fees, if any, are additional, and billed at cost plus a \$450 procurement fee.

Client Initials



ALL WORK TO COMPLY WITH NSL DRAWING #: NS 6249 REV: DATED: 01.25.22

We propose hereby to furnish material and labor in accordance with above Specifications for:

INVESTMENT: \$69,570.00 SALES TAX: EXEMPT TOTAL: \$69,570.00

Investment amount to remain in effect for 30 days from the date this agreement was issued. After 30 days, the Investment amount is subject to change based on market conditions.

SIGN TYPE A QTY: 1

SCOPE OF WORK:
 1. INSTALL AND INTERNALLY ILLUMINATED Pylon
 2. LED DISPLAYS

ALL ALUMINUM CONSTRUCTION:
 • ARCHED CABINET FINISH: P1 AND P2
 • TEXT: ROUTED INTO FACE AND BACKED WITH 3/16" THICK,
 #202 WHITE ACRYLIC WITH 1ST SURFACE APPLIED, V1 VINYL
 SUPPORTS 3/8" STANDING STEEL PIPE W/4" O.D.X
 236 THICK WALL FINISH: P2

MAIN ID & SECONDARY ID CABINET FINISH: P3
 • TEXT: ROUTED INTO FACE AND BACKED WITH 1/2"
 THICK CLEAR ACRYLIC 3/8" TO EXTEND PAST FACE —
 2nd SURFACE VINYL DIFFUSER APPLIED AND 1ST SURFACE V3
 APPLIED WHITE VINYL

FLAT CUT OUT STAR: 125 ALUMINUM FLUSH MOUNTED TO
 CABINET FACES
 FINISH: P3 WITH APPLIED V2 VINYL

REVEALS: 2" HIGH, FINISH: P2

LED DISPLAYS:
 • 40 X 150 FULL COLOR LED MATRIX (15.25mm PINKL PITCH)
 • 2 1/2" HIGH 8 1/2" WIDE CABINET
 • 2 1/2" HIGH 7'-0" WIDE DISPLAY AREA
 • COMMUNICATIONS CELLULAR MEDIUM
 • FILLER BETWEEN CABINETS: FINISH: P2

POLE COVER: FINISH: P2 AND P4
 ACCENTS ON POLE COVER: FINISH: P5

CONCRETE PAD: 3" LARGER ALL AROUND THAN SECTION
 ABOVE, MIN 4" ABOVE GROUND/ MIN 3" BELOW GRADE

- INTERNALLY ILLUMINATED
- ALUMINUM ANGLE FRAME
- NO VISIBLE FASTENERS ON FACE
- COUNTER SUNK SCREWS ON ENDS

FINISH SCHEDULE


PAINT COLORS - MAIN FINISH

- P1: PMS WARM GRAY 8/C
- P2: HP BLACK
- P3: PMS DK BURGHINDY 220-48
- P4: PMS 504C BROWN
- P5: PMS 740/C GOLD
- P6: HP WHITE

VINYL COLORS

- V1: TONAL GOLD MUGGET 2305.13
- V2: DTM GOLD PMS 740/C & BROWN PMS 504C (WITH POLYURETHAN CABINETS)
- V3: TONAL WHITE 230-20

APPROVED BY: _____

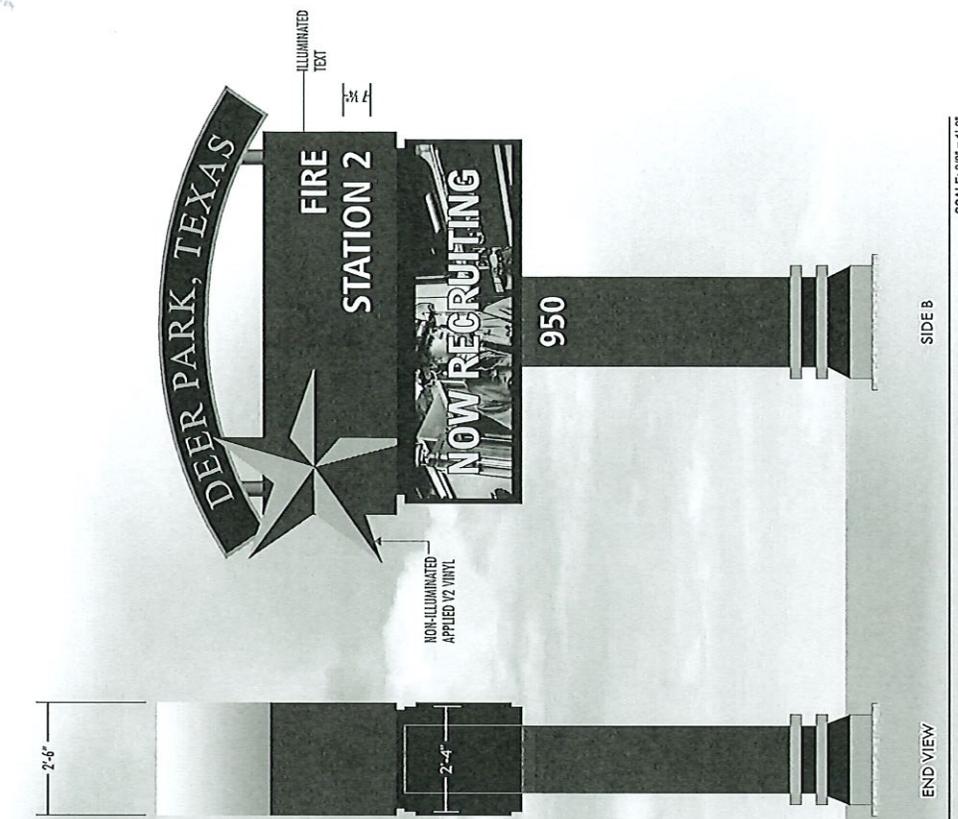

SIGN DETAIL SCALE: 3/8" = 1'-0"

PROJECT: CITY OF DEER PARK
LOCATION: 860 W. PASADENA BLVD
CITY/STATE: DEER PARK, TX 77558
DATE: 1.25.22
SALES / PM: GLORIA BAKER
DESIGNER: KEN PHU
DRAWING#: 849

National Signs
 2611 El Camino - Houston, TX 77054
 T: 713.863.0600 - F: 713.863.7585
 www.NationalSigns.com

REVISIONS

NO.	DATE	DESCRIPTION
A	11.30.23	REMOVE OPTION 1
B	02.20.24	ADD 15.88mm OPTION BACK TO SCOPE

SIGNATURES

CLIENT APPROVAL	DATE

LANDLORD APPROVAL	DATE

SALES APPROVAL	DATE

COPYRIGHT
 THE RENDERING IS THE PROPERTY OF NATIONAL SIGNS, LLC. ANY
 REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY
 MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING,
 RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL
 SYSTEM, WITHOUT THE WRITTEN CONSENT OF NATIONAL SIGNS, LLC,
 IS STRICTLY PROHIBITED.

UL INSTALLATION REQUIREMENTS
 THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE
 REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE (NEC) AND
 OTHER APPLICABLE LOCAL CODES. THIS INCLUDES PROPER GROUNDING AND
 BONDING OF THE SIGN.

120 VOLT ELECTRICAL SERVICE
 SIGN LED DISPLAY
 ELECTRICAL LOAD: _____
 20 AMP CIRCUIT(S): _____
 PROVIDE PRIMARY ELECTRICAL WITHIN 10' OF STREET END OF SIGN
 PROVIDE PRIMARY ELECTRICAL AT CENTER OF SIGN
 CLIENT TO PROVIDE ALL PRIMARY ELECTRICAL SERVICES TO THE
 SIGN UNLESS OTHERWISE SPECIFIED